

**Continuous Ink Supply System**  
**for**  
**Canon ip 6000 Printer**

**Installation Instruction**

**For XM Empty Cartridge Version**

**With Auto Reset Chips**

This Version of the Continuous Ink Flow System comes with empty Cartridges and Auto Reset Chips. You just need to fill the Reservoir bottles and print! The whole operation is very easy. It ' s really an effective tool to save your money.

# CIS for Canon ip 6000 Instruction



## **READ ALL INSTRUCTION PRIOR TO INSTALLING YOUR NEW SYSTEM**

Thank you for purchasing XM Continuous Ink Supply System. We appreciate your support and will try our best to make your experience with our products a pleasant one. Printing has been a different experience ever since you installed XM Continuous Ink Supply system on your own printer. Just imagining being able to print without regard to the ink level in those expensive little cartridges.

Please take your time installing XM Continuous Ink Supply system. Do not remove your old cartridge until you have the XM CIS system primed and ready to install (to prevent the drying of heads). In addition, make sure you are getting perfect nozzle checks before installing the XM CIS system. The XM CIS system won't be able to work properly if the nozzles are previously clogged.

Most people get a perfect nozzle check the first time after installing the XM Continuous Ink Supply system; others may need to run two or three cleaning cycles or let the printer sit for a while before they get the perfect results.

**Step 1 :** Check the printer head before beginning the installation.



**Step 2 :** After checking the printer head and everything is ok, then open the above cover of the printer to move the cartridge to the cartridge change position (Picture A).



(A)

**Step 3:** Unplug the power connector at the back of the printer (Picture B). This will prevent the printer from “auto powering down”, allowing you have as much time as you need to complete the installation. Then remove the original cartridges from the cartridge carrier as picture (C) shows.




(B)



(C)

**Step 4:** Pull the rubber out of the filling hole (Picture D), and use refill kits to fill ink into the reservoir bottles to the full (Picture E). **Note:** Be sure to fill the ink according to the color labels on the reservoir bottles!

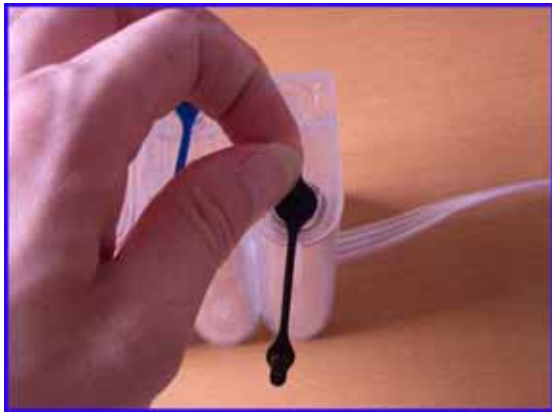

(D)



(E)

**Step 5:** Fix the protective covers on the inside cartridges (Picture F&G).



(F)




(G)

**Step 6:** After all the 6 reservoir bottles are filled with ink, cover the ink filling hole with rubber seals (Picture H). And then insert the vacuum refill kits in the ventilation holes and draw the refill kits upwards until the cartridges are full (Picture I).



(H)

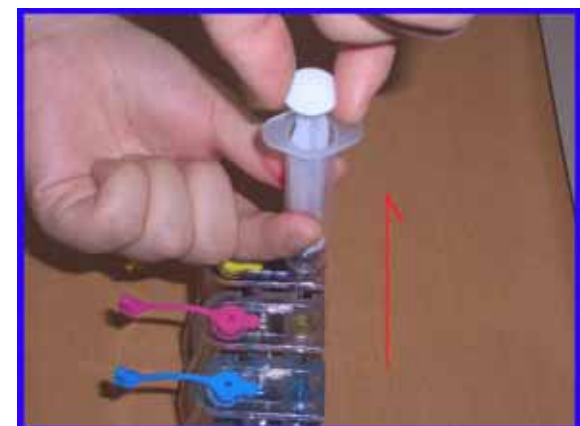

(I)

**Step 7 :** Insert the cartridge into the cartridge carriage. Put the Tube into the Support Arm and Small Tube clamp as the below picture (J) shows.



(J)

**Step 8:** Use tube holder to fix the tube, and fix it on the left side of the printer (Picture K & L)



(K)



(L)

**Step 9:** Put the reservoir bottles flat so that the ink can flow into the storing part of the reservoir bottle. (Picture M & N)



(M)



(N)



Pull the rubber seal out of the ventilation hole of the Reservoir bottle (Picture O), and insert the air filter in the ventilation hole (Picture P)



(O)



(P)

**Step 10 :** Slide the cartridge back and forth from left to right several times; make sure the tubes not too tight when cartridge is in the far right and left position (Picture Q & R).



(Q)



(R)

**Step 11 :** Connect the power and recover the printer cover so that the touch button is closed (Picture S & T).



(S)



(T)

**Step 12:** After the CISS is installed, please print test paper first.

Note: If the test paper has banding line, pls clean the printer head 3 times. If there is still banding problem, pls contact us for better solution.

## Now it is ready to print!

**Caution:** when the ink in the reservoir bottle is less than 1 cm high, pls fill the ink immediately, so that it can print continuously. You can refer to Picture to fill the ink. Pull out the rubber seal in the ink-filling hole, and fill the ink. Pls pay attention to fill the ink according to the color labels on the reservoir bottles.

### Notice:

1. Please don't take out cartridge at random after installing the CIS system. Keep the reservoir bottles on the same level with the printer.
2. Try to keep at least 1/2 inch of ink in the bottles, as you don't want to run out of ink and draw air into the cartridge.
3. Don't place the Reservoir Bottles higher or lower much than the printer.
4. To be used in a dry place between 15 and 35degree. Avoid exposure to direct sunlight.
5. Don't put the continuous ink supply systems reversed or leaning during the shipment. Please make sure all the ink filling holes and Ventilation holes are closed tightly during the transportation. Otherwise, the ink shall leak out.
6. Don't sway the cartridge frequently. Don't pull out the connector of cartridge and don't tear off adhesive tape at the bottom of cartridge. These may cause ink leakage.
7. When the ink in the reservoir bottle is less than 1 cm high, pls fill the ink in time. Should there be any air coming in the tube, it is quite normal. And this will not effect the printing quality.

### Warning:

1. Not drinkable; keep it out reach of children.
2. Avoid exposure to direct sunshine and don't keep it in high or freezing temperature.
3. Avoid collision and fallen down.